



**EGYPTIAN
INTERNATIONAL
COMPANY**

12V 100 Ah

STAND-BY BATTERY SOLAR SERIES

**TOWARDS
A BRIGHTER FUTURE**




VdS






**SINCE
1959**

EIC - Egypt - Cairo - Alexandria Desert Rd, KM 28 - +201010002030 - info@eic-egypt.com - www.eic-egypt.com - 2024

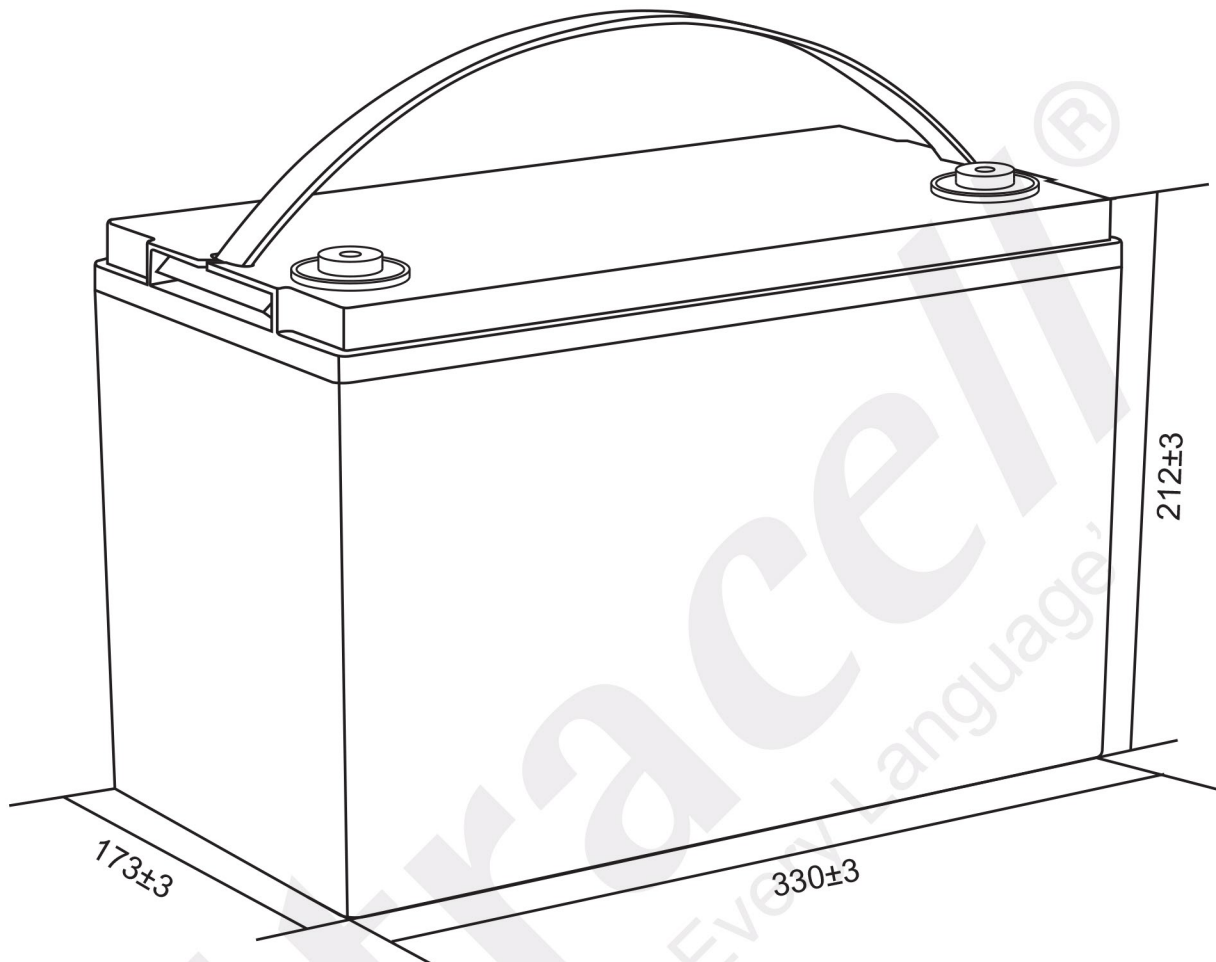

Technical Dimensions (mm)

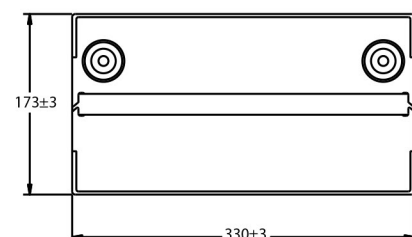


Image




Terminal Dimensions (mm)

Standard Terminal: F11



Optional Terminal: F10



Technical Specification

Output	Nominal Voltage	12V
	Nominal Capacity (10HR)	100Ah
Terminal Type	Standard Terminal	F11
	Optional Terminal	F10
Container Material	Standard Option	ABS
	Flame Retardant Option (FR)	ABS (UL94:VO)
Rated Capacity	(20HR 1.80V/cell, 25°C)	103.0 Ah/5.15A
	(10HR 1.80V/cell, 25°C)	100.0 Ah/10.0A
	(5HR 1.75V/cell, 25°C)	85.0 Ah/17.0A
	(3HR 1.75V/cell, 25°C)	73.8 Ah/24.6A
	(1HR 1.60V/cell, 25°C)	59.7 Ah/59.7A
Max Discharge Current	1200A (5s)	
Internal Resistance	Approx 5mΩ	
Discharge Characteristics	Operating Temp Range	Discharge: -15 ~ 50°C
		Charge: 0 ~ 40°C
		Storage: -15 ~ 40°C
	Nominal Operating Temp Range	25 ± 3°C
	Cycle Use	Initial Charging Current less than 30A. Voltage 14.4V ~ 15.0V @ 25°C Temp. Coefficient -30mV/°C
Standby Use	Capacity affected by Temperature	Initial Charging Current less than 30A. Voltage 13.5V ~ 13.8V @ 25°C Temp. Coefficient -20mV/°C
		40°C 103%
		25°C 100%
Design Floating Life at 20°C	10 Years	0°C 86%

Self Discharge


Ultracell® UCG batteries may be stored for up to 6 months at 25°C and then a refresh charge is required. For higher temperatures the time intervals will be shorter.

Constant Current Discharge / Constant Power Discharge At 25°C (Amperes & Watts/Cell)


A = Amperes W = Watts

F.V/TIME	5	10	15	20	30	45	60	2	3	4	5	6	8	10	20
A W	min	min	min	min	min	min	min	hours	hours	hours	hours	hours	hours	hours	hours
1.85V/cell	161.2	126.8	107.8	90.2	71.2	54.1	44.8	28.5	22.1	18.2	15.4	13.5	11.0	9.28	5.00
	297.0	235.9	202.7	171.2	136.5	104.5	86.8	55.4	43.2	35.7	30.4	26.5	21.7	18.4	9.94
1.80V/cell	213.3	159.6	128.3	105.0	82.0	61.4	49.8	30.9	23.8	19.4	16.6	14.4	11.7	10.0	5.15
	389.0	293.8	238.3	196.7	155.2	117.7	96.0	59.9	46.2	37.8	32.5	28.4	23.1	19.8	10.2
1.75V/cell	245.4	179.0	143.1	115.3	87.4	64.9	52.7	32.4	24.6	20.0	17.0	14.8	11.9	10.1	5.20
	437.8	324.0	262.2	213.7	164.0	123.4	101.1	62.6	47.7	38.9	33.2	29.1	23.4	20.0	10.3
1.70V/cell	273.4	197.4	154.5	122.6	92.2	68.2	55.0	34.0	25.5	20.6	17.5	15.2	12.0	10.2	5.30
	473.5	348.6	278.8	225.2	171.8	128.9	105.0	65.5	49.2	40.0	34.0	29.6	23.7	20.1	10.5
1.65V/cell	298.6	210.9	162.7	129.0	96.6	70.2	57.0	34.9	26.4	21.2	17.9	15.5	12.2	10.3	5.35
	508.8	368.4	290.7	234.7	178.2	131.7	108.1	66.9	50.9	41.0	34.7	30.2	24.0	20.3	10.6
1.60V/cell	332.0	230.9	175.5	138.5	102.6	74.3	59.7	36.2	27.3	21.7	18.2	15.8	12.4	10.4	5.40
	552.6	394.1	308.3	249.3	187.8	138.3	112.7	69.0	52.4	41.8	35.2	30.8	24.3	20.6	10.7


Discharge Characteristics

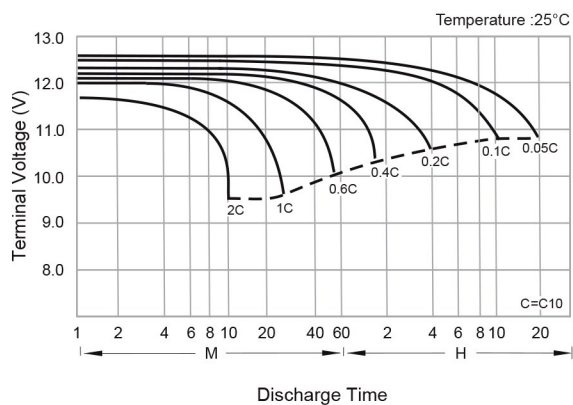


Temperature Effects in Relation to Battery Capacity

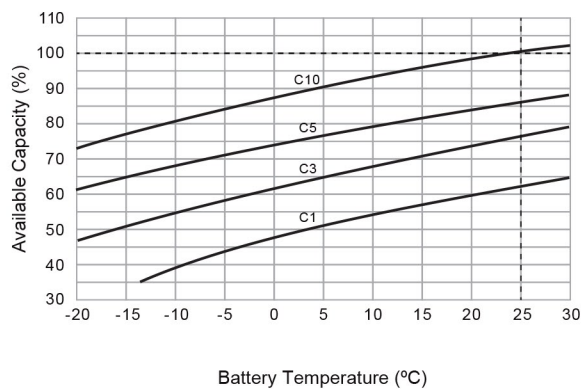


Cycle Life in Relation to Depth of Discharge

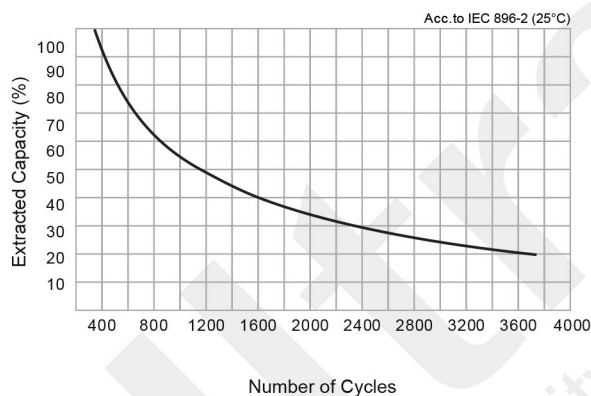


Float Charging Characteristics

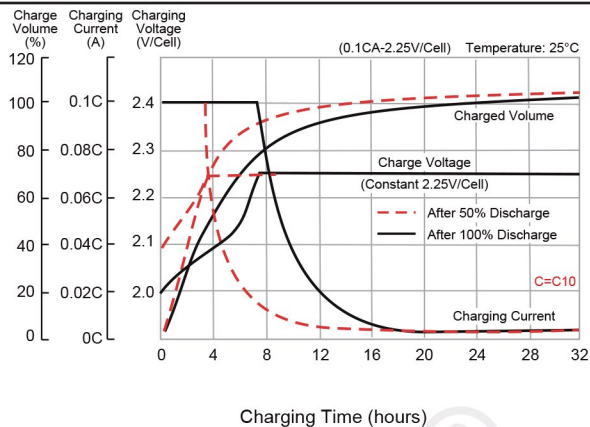

Effect of Temperature on Long Term Float Life

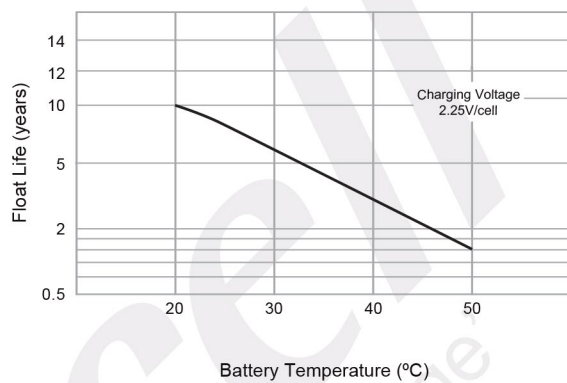

General Relation of Capacity vs. Storage Time

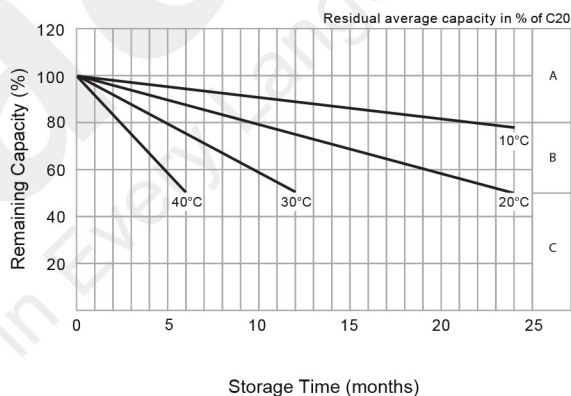

Constant Current Discharge / Constant Power Discharge At 25°C (Amperes & Watts/Cell)

- No supplementary charge required.
(Carryout supplementary charge before use if 100% capacity is required.)
- Supplementary charge required before use. Optional charging way as below:
 - Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
 - Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.
 - Charged for 8 ~ 10 hours at limited current 0.05 CA.
- Supplementary charge may often fail to recover the capacity.
The battery should never be left standing till this is reached.